


Gyp System


H.O. : No.25, Sivasubramaniam Chettiar Street (Opp.) V.A.T. Matriculation School,
Tirupur - 641 604. Tamilnadu, INDIA. Ph : +91- 421 - 4321228

COIMBATORE • TIRUPUR • ERODE • KARUR • SALEM


Gypsum False Ceiling Tiles & Suspension System

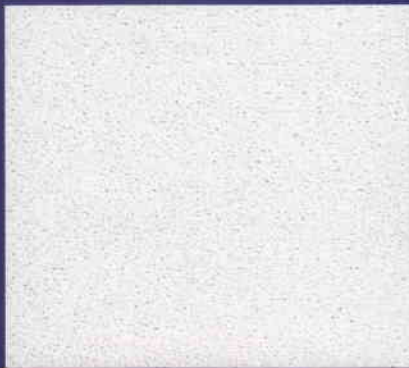

AST154

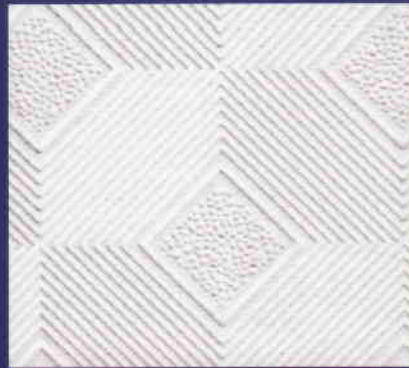

AST567

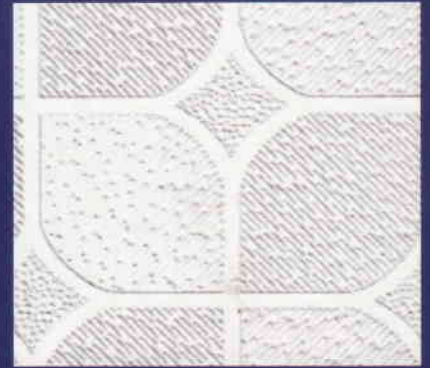

AST572



AST573



AST574



AST575



AST576



AST996

Avail Our Services at :

50/39, Dr. Radhakrishna Road,
Tatabad, Coimbatore - 641 012.
Ph : + 91-422-4212929

A.M. INDUSTRIES, D-202, Twin Arcade,
Military Road, Marol, Andheri (East),
Mumbai - 400 059. Tel : +91-22-29205186



ARABIAN STAR BUILDING
MATERIALS TRADING
P.O. Box 37120, Sharjah, U.A.E
Tel. : 0097165430882

Gypsum Vinyl Tile Technical Specification

ARUBA brand Gypsum Ceiling Tiles are made from premium quality Plaster Board manufactured from natural crude gypsum, which is a kind of preferred material of green health decoration and environment friendly, which has no poison, no radiation, no pollution, under strict quality control and perfection. These Gypsum tiles are laminated with Vinyl finishes of various designs on one side which gives an elegant look for the entire false ceiling and the other side is laminated with Aluminium Foil which protects the false ceiling from moisture and water penetration. These tiles have excellent resistance to air borne sound waves, impact sound transmission and heat.


Edge Details	:	Square edge
Thickness	:	8.0 to 12.0 mm
Tile Size	:	600 x 600 mm (cut size 595 x 595 mm) 600 x 1200 mm (cut size 595 x 1195 mm)
Fire Resistance	:	Conform to BS1230 Part I 1985, BS 476 Part 8 1972
Water Resistant	:	Gypsum Vinyl Tiles are water resistant.
light Reflection	:	Estimates at 75%
Acoustic Performance	:	Sound Transmission loss of 30 db

ARUBA T-Grid Suspension System

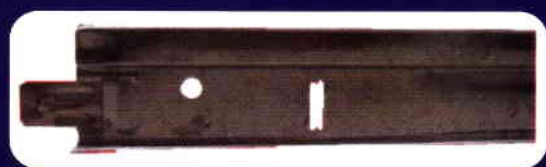

Main Runner


3.6 m (L) x 24 (W) x 38 (H) x 0.30 mm (T)



Cross Tee

1.2 m (L) x 24 (W) x 25 (H) x 0.30 mm (T)

0.6 m(L) x 24 (W) x 25 (H) x 0.23 mm (T)



Wall Angle

3.0 m (L) x 22 (W) x 19 (H) x 0.40 mm (T)

Features

Maximum Load Carrying/m² : 7.10 kg/m²

Main Runner Loading meet to 11.67 Kg/m

Override end design resists twisting in Cross Tee

Colour : Polished white color is standard.

Material : Double web, hot-dipped galvanized steel in body.

Installation : Must be installed in accordance with ASTM C636.

Our Overseas Services at :

Sharjah : +97165430882

Fujairah : +971556429972

Doha : +9745545184

QINGDAO ARUBA DECORATION MATERIAL CO., LTD.
青島阿羅巴裝飾建材有限公司